



NanoPower Battery 3000mAh

Datasheet

Lithium Ion 18650 cells for space flight products – 3000mAh

Product name: NanoPower Battery 3000mAh

Document No.: 1022248

Revision: 2.1

Author: LAV

Approved by: BOLE

Approval date: 13.08.2024

Confidentiality Notice

This document is submitted for a specific purpose as agreed in writing and contains information, which is confidential and proprietary. The recipient agrees by accepting this document, that this material will not be used, transferred, reproduced, modified, copied or disclosed in whole or in part, in any manner or to any third party, except own staff to meet the purpose for which it was submitted without prior written consent.

GomSpace © 2024

1 Table of Contents

2	INTRODUCTION.....	4
3	CHARACTERISTICS.....	4
	3.1 Electrical and thermal characteristics.....	4
4	CYCLE LIFE.....	5
5	STORAGE.....	5
6	PROTECTION.....	6
7	QUALITY CONTROL.....	6
8	SAFETY TEST.....	6
9	DISCLAIMER.....	6
10	CHANGELOG.....	6

2 Introduction

When choosing batteries for a satellite mission it is important to make sure that they can withstand the hostile environment encountered in space. The GomSpace batteries provide extensive testing and are chosen specifically for their suitability in satellite missions. NanoPower Battery 3000mAh is space proven and with a flight heritage.


3 Characteristics

The battery available from GomSpace are lithium-ion and from the rugged and space proven 18650 form factor.

3.1 Electrical and thermal characteristics

Parameter	Condition	Min.	Typ.	Max	Unit
Nominal Capacity, for 1500mA discharge	@ 2.0 V cut-off		3000		mAh
	@ 2.95 V cut-off	2700	2750	2800	mAh
	@ 2.95 V cut-off, and charging to 4.0 V	2050	2100	2150	mAh
Voltage	Safe	2.0	3.6	4.2	V
	Recommended	2.95		4.0	
Current - Charge	0 to +50 °C		1500	4000	mA
Current - Discharge	-20 to +75 °C		1500	6000	mA
Temperature – Storage (recommended)	3 months	-20		45	°C
	12 months	-20		20	°C
Temperature - Operating	Charge	0		50	°C
	Discharge	-20		75	°C
Internal impedance	1 s, 3000 mA, 60% SOC		21		mΩ
	20 s, 3000 mA, 60% SOC		36		mΩ
	1 Hz		<= 20		mΩ


Battery discharging characteristics:

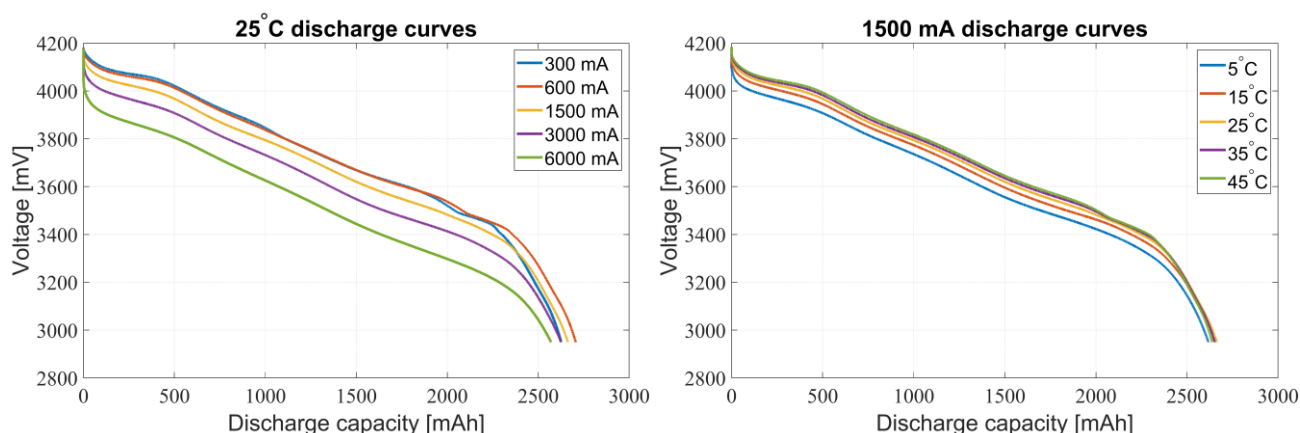

4 Cycle Life


The cycle life of any rechargeable battery depends on a number of factors, but most importantly the Depth-Of-Discharge (DOD) of the cycles, temperature, charge/discharge current and End of Charge Voltage (EOCV). General rules are that:

- The lower the DOD, the better the cycle life.
- The lower the temperature, the better the cycle life (unless too low for charging).
- The lower the charge/discharge current, the better the cycle life.
- The lower the EOCV, the better the cycle life.

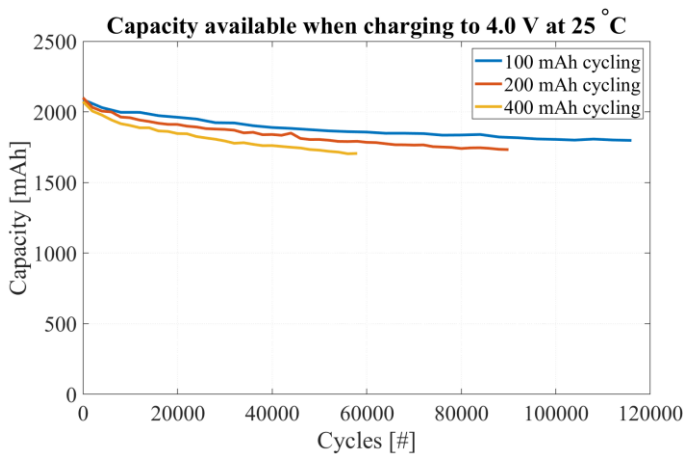

A sample of experimentally measured data:

- For aging: the cells were cycled at a specific DOD (100, 200 or 400 mAh) and charged to a specific charging cut-off voltage (4.0 V).
- The presented remaining capacity is related to the respective charging conditions (charging to the charging cut-off voltage of 4.0 V)
- The presented curves were obtained in an accelerated testing manner

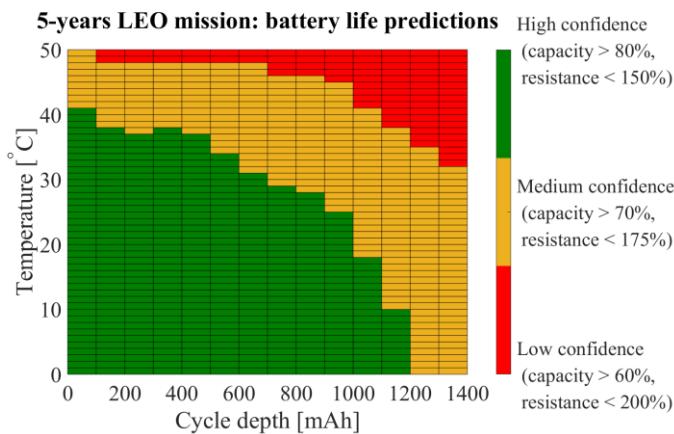

Lifetime projections for a 5-years LEO mission:

- Projections based on experimental testing and modelling
- Included dependence on battery temperature and cycle depth (depth-of-discharge)
- It is considered 5500 cycles per year
- Projections are split by the confidence of staying above-selected thresholds

5 Storage

For prolonged storage, it is recommended to charge the batteries to 30 – 60 % SOC (approximately 3.6 – 3.9 V voltage limit with 50 mA charging cut-off) and keep temperatures lower than 25°C (preferably 0 - 10°C).

The cells are expected to self-discharge 0.004 – 0.03 mAh per month according to the storage conditions (higher self-discharge for higher SOC and higher temperature).

To avoid over-discharge and consequent deterioration of the batteries, it is advised to consider the cell's self-discharge, together with a battery pack / an electrical power supply self-consumption, or to monitor battery voltage and recharge the batteries when needed over prolonged storage.

6 Protection

The cells are equipped with a current-interrupt device (CID) and a vent. The CID is triggered by an increase of an internal pressure because of overcharging or overheating of the cell. The estimated threshold is 1.017 MPa. Triggering the CID causes disconnecting conductive paths inside of a cell to prevent further (dis)charge and it causes a permanent open circuit across the cell. The vent is triggered by an internal pressure exceeding an estimated value of 1.906 MPa, which results into releasing accumulated gases inside of the cell to prevent or reduce a risk of a rupture or an explosion.

Protections regarding undervoltage, overvoltage and overcurrent are typically implemented at a battery pack or at an electrical power supply unit.

7 Quality Control

Samples from every LOT are tested according to “Requirements for flight certification and acceptance of commercial off the shelf (COTS) Lithium-Ion (Li-Ion) batteries,” JSC 66548, for physical characteristics, overcharge and external short.

Every cell goes through the flight acceptance test (FAT), which is based on the document “NASA Aerospace Flight Battery Program” by NASA, document no.: RP-08-75 Rev. 1.0. The cells are checked for their physical and electromechanical characteristics, i.e., any occurrence of deformations, open-circuit voltage, capacity, and internal resistance.

8 Safety Test

The battery cell has been tested, by the Manufacturer, according to the following standards:

- UL1642; Safety Standard for Lithium Batteries
- UN38.3; Transportation Testing for Lithium Batteries and Cells
- IEC 62133; Safety requirements for portable sealed secondary cells and batteries.

9 Disclaimer

The information in this document is subject to change without notice and should not be construed as a commitment by GomSpace. GomSpace assumes no responsibility for any errors that may appear in this document.

In no event shall GomSpace be liable for incidental or consequential damages arising from use of this document or the software and hardware described in this document.

10 Changelog

Date	Revision	Author	Description
27 Sep 2019	1.0	VAKN	First edition
5 April 2022	2.0	VAKN	Cycle life data updated Table with electrical and thermal characteristics updated
13 Aug 2024	2.1	LAV	Added section 8 about Safety Tests