





# OPTION SHEET FOR NANOSTRUCTURE 6U MK2

Customer Product ID: \_\_\_\_\_ (optional, enter your reference here)


Order number: \_\_\_\_\_

## 1. Configuration Table

Ring sets – select number of units (extra cost)		
<b>1 x A ring</b> <b>1 x B ring</b> <b>4 x M3 threaded rods (94.6mm)</b> <b>8 x M2.5x5 screws</b> <b>8 x M3 round nuts DIN546</b>		
<b>1 x YA ring</b> <b>1 x YB ring</b> <b>4 x M3 threaded rods (94.6mm)</b> <b>8 x M2.5x5 screws</b> <b>8 x M3 round nuts DIN546</b>		

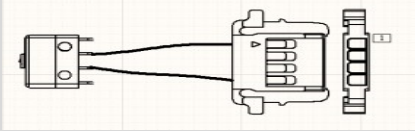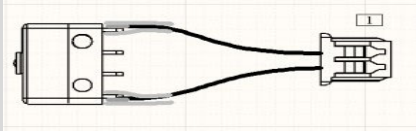KS Termination – Select Termination Type and lenght (Max one per row)		
	Type	
	<b>Molex PicoLock 504051-0401</b> <b>Normally Closed (NanoDock P60)</b>	<b>Molex PicoBlade 51021-0200</b> <b>Normally Open (NanoDock P80)</b>
<b>Kill Switch</b>		
KS1 and wire length (cm)		
KS2 and wire length (cm)		
KS3 and wire length (cm)		
KS4 and wire length (cm)		

Note: If no option is selected for any KS, the relative KS will be shipped without cables attached

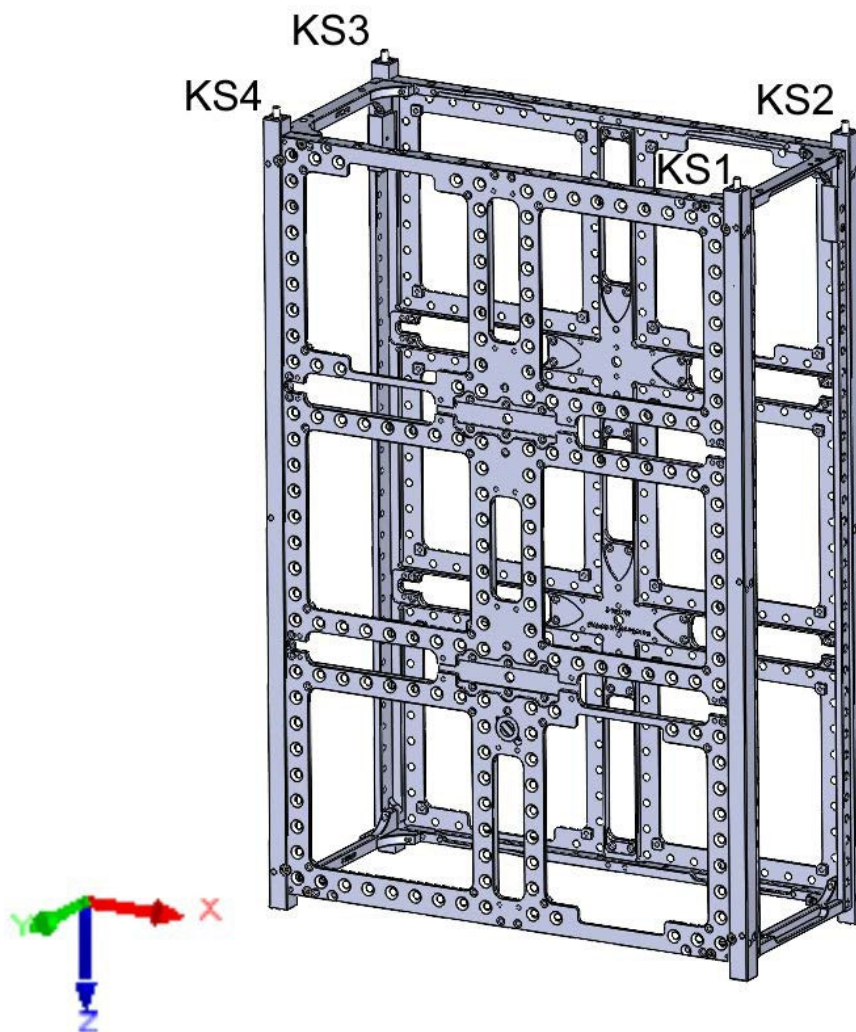

Product name: NanoStructure 6U MK2

Document No.: 1058828

Revision: 1.4

Author: PNN

Approved by: PHK

Approval date: 04-03-2025

## Confidentiality Notice

This document is submitted for a specific purpose as agreed in writing and contains information, which is confidential and proprietary. The recipient agrees by accepting this document, that this material will not be used, transferred, reproduced, modified, copied or disclosed in whole or in part, in any manner or to any third party, except own staff to meet the purpose for which it was submitted without prior written consent.

GomSpace © 2019