





OPTION SHEET FOR NANOSTRUCTURE 8U

Customer Product ID: _____ (optional, enter your reference here)


Order number: _____

1. Configuration Table

1U Ring sets – select number of units (extra cost)		
1 x A ring 1 x B ring 4 x M3 threaded rods (94.6mm) 8 x M2.5x5 screws 8 x M3 round nuts DIN546		
1 x YA ring 1 x YB ring 4 x M3 threaded rods (94.6mm) 8 x M2.5x5 screws 8 x M3 round nuts DIN546		

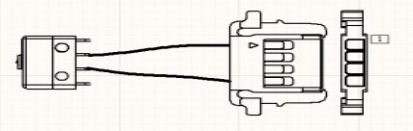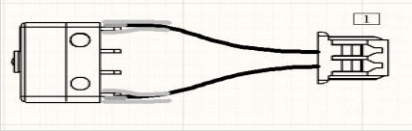KS Termination – Select Termination Type and length (Max one per row)		
Kill Switch	Type	
	Molex PicoLock 504051-0401 Normally Closed (NanoDock P60)	Molex PicoBlade 51021-0200 Normally Open (NanoDock P80)
		
KS1 and wire length (cm)		
KS2 and wire length (cm)		
KS3 and wire length (cm)		
KS4 and wire length (cm)		


Note: If no option is selected for any KS, the relative KS will be shipped without cables attached

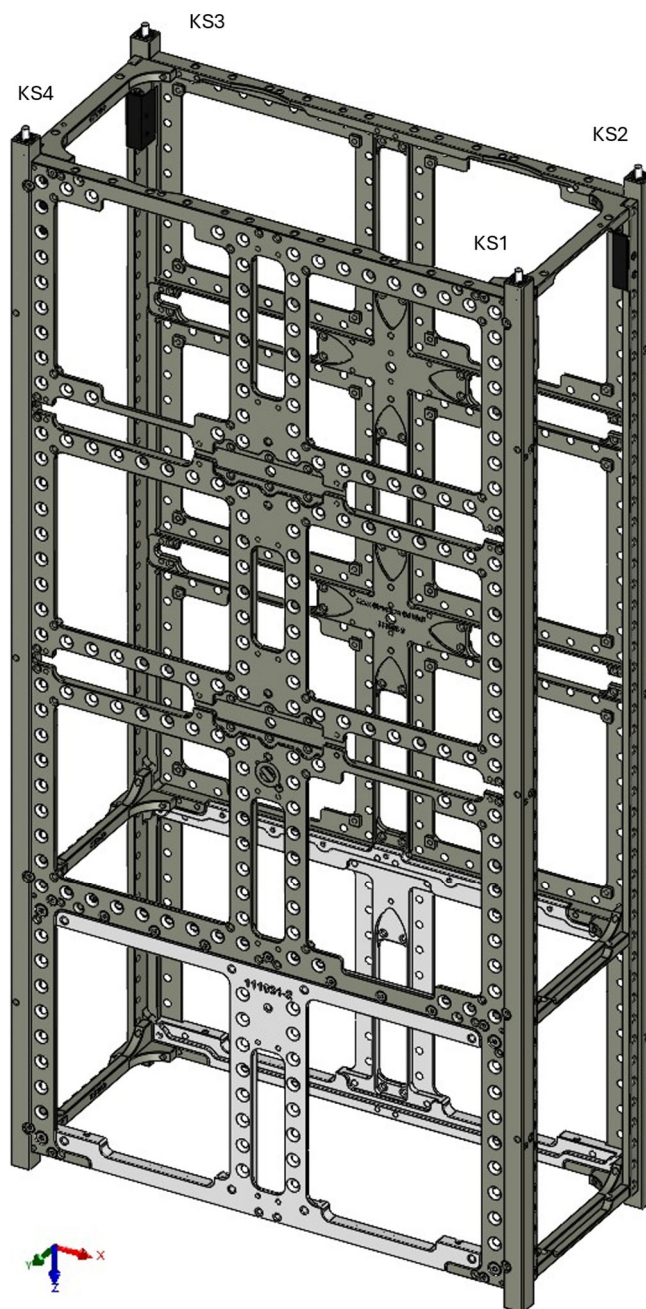

Secondary Structure

**For extra cost
add Secondary Structure**

For more information see:
Datasheet, paragraph 5.2.

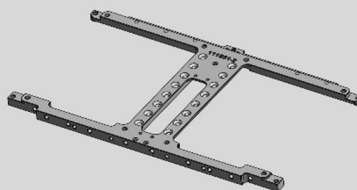

Product name: NanoStructure 8U

Document No.: 1066044

Revision: 1.1

Author: FJVO

Approved by: PNN

Approval date: 23-06-2025

Confidentiality Notice

This document is submitted for a specific purpose as agreed in writing and contains information, which is confidential and proprietary. The recipient agrees by accepting this document, that this material will not be used, transferred, reproduced, modified, copied or disclosed in whole or in part, in any manner or to any third party, except own staff to meet the purpose for which it was submitted without prior written consent.

GomSpace © 2019